

FP Series



Standard Features

3/8" cast iron non-skid black matte finish floor plate.

Self-closing hinged door.

Various 15, 20 and 60 Amp receptacles available.

3/4" white die-cut circuit identification.

Blank receptacle plate for on-site receptacle mounting.

16 gauge galvanized steel back box and receptacle plate.

UL listed and labeled.

Optional Features

Custom circuit identification.



LED indicator lights.

Neoprene dust flaps.

Custom back box sizes.

16 gauge steel back box and steel receptacle plate with black matte finish.


DMX input/output.

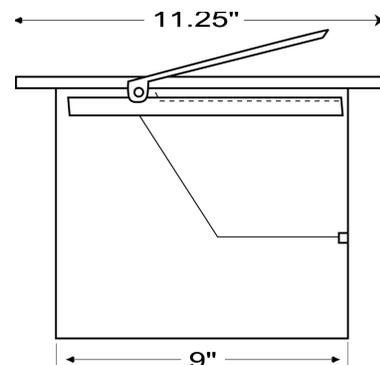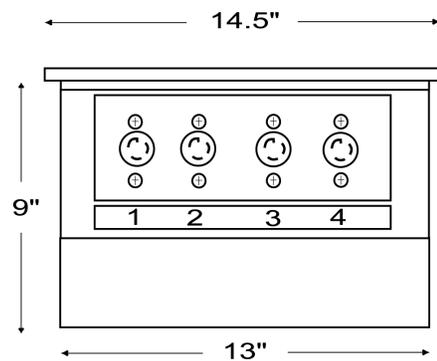

- A. This assembly shall consist of a 16 gauge, galvanized housing designed for recessed mounting in the floor. The unit shall be provided with a 3/8" thick self closing, cast iron, non-skid floor plate with hinged door and cable notches.
- B. The box may have up to six flush receptacles mounted on a 16 gauge galvanized steel angled receptacle plate.
- C. The box shall be completely pre-wired at the factory, with ground lugs installed.
- D. The entire assembly shall be listed and labeled by Underwriters Laboratories.

Ordering Information

<u>OUTLET TYPE</u>	<u>DESCRIPTION</u>
2PGFL	20 Amp. Stage pin receptacle
L520R	20 Amp. Twist lock receptacle
520R	20 Amp. Parallel blade receptacle

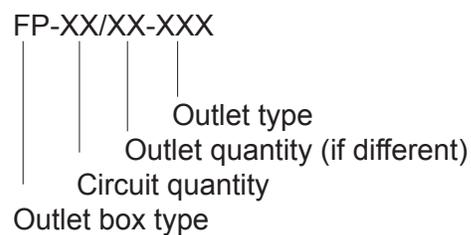

Sample: FP-4-2PGFL
 Floor Pocket Outlet Box with 4 - 20 amp circuits and 4 stage pin receptacles.

Please specify circuit numbering when ordering. Consult the factory for custom types and sizes.